

## Brembo Swap Wheel Options

ATS:

03/04 Cobra 5 Star



## Stock Cobra Anniversary Wheels

17" LMR Ponies

FR500 17"



Jegs 17" Front Runners

SVE Series 3 18" (ATS and XTS)



SVE Series 2



Wed Ventura 5 18x8 5.625 offset pictured



CCW 505a 18x9



CCW Classics

TruForged



98 Cobra R 17x8

18x9" Cosmic Racing XT-206R (5mm Spacer for spoke clearance) – Also fits XTS



CCW 18"



### BC Forged

NOTES: FRONT BRAKE MEASUREMENTS PRC  
HUBS/SPINDLES  
BRAKES: ATS-V RETROFIT FRONT & OEM/ST  
18x8.5 +22 LE10 // register shifted - flat lip  
18x10.0 +23 LE10 // register shifted - flat lip



### ESR 18x9.5 +22 (no spacer)



Weld



AMR 18x8.5



18x9 17mm offset



Spare Options:

Racestar Recluse 145/70/18 pictured



17x8 Enkie TS9 (3mm spacer)

Apex 18x9.5 +35



**DOES NOT FIT:**

BBK RKs (requires spacer to clear spoke)

Aodhan 18x8.5 +35

99-04 Bullitt wheels (large spacer would be required)

99/01 Cobra, 94-97 Cobra wheels, 96-98 Split 5star (spacer required for spoke clearance)

17x9 +25 XXR 531 will rub the barrel and 3/8" spacer required for spoke clearance

17x9 +26 BBS RX require spacers to clear spokes

18x9 +25 Cosmis XT-005R (8mm + spacer required to clear spokes)

XTS:




The GT500 brakes are HUGE behind that 18" Saleen wheel. The calipers BARELY clear the

SVE Series 3 18"


Specs if ordering wheels or measuring ATS setup:

(SVTP Termn804)

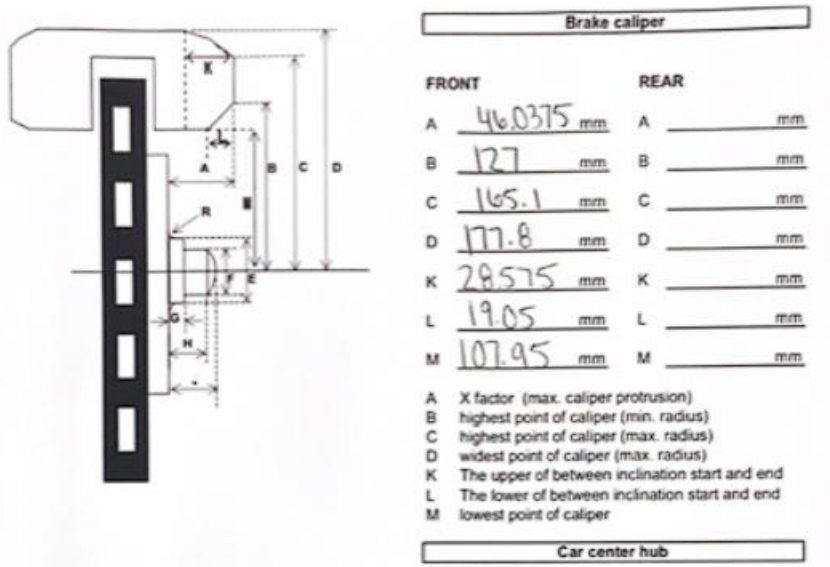

Mike Dula (HouseofDula youtube):

# Cadillac ATS Brembo Caliper Dimensions Fox SN95 (1995) Spindles / 13" Cobra rotors

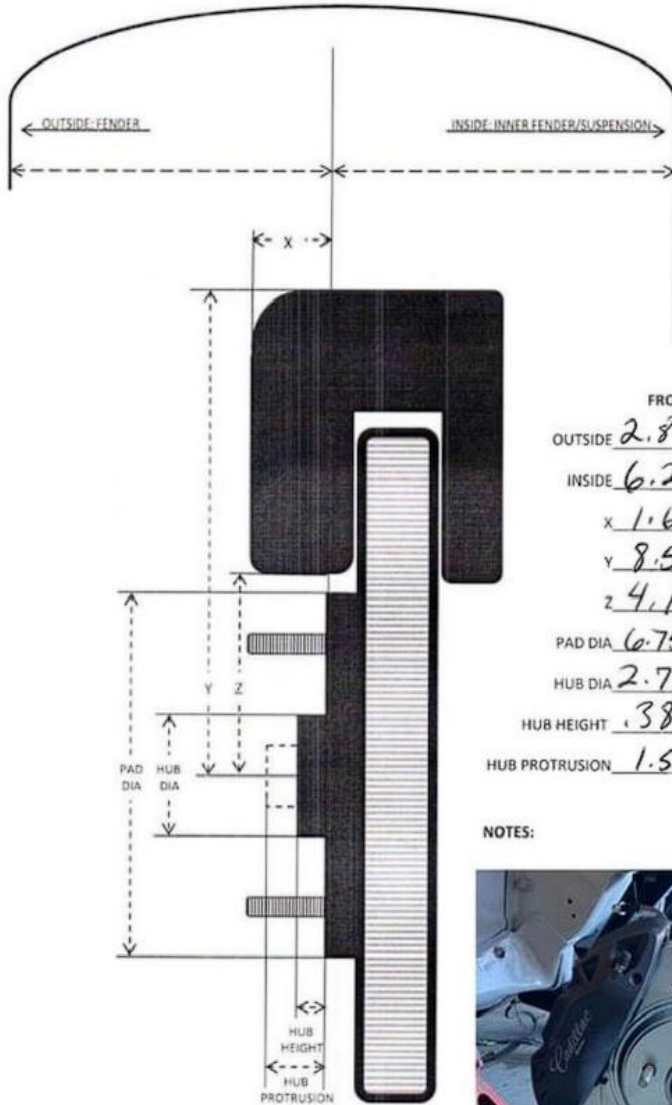

	FRONT	REAR
OUTSIDE	2.8 in	_____
INSIDE	6.25 in	_____
X	1.67 in	_____
Y	8.5 in	_____
Z	24.1 in	_____
PAD DIA	6.75 in	_____
HUB DIA	2.78 in	_____
HUB HEIGHT	1.38 in	_____
HUB PROTRUSION	1.5 in	_____

NOTES:

